



TIRES FOR WHEEL EXCAVATORS

SOLIDEAL WEX



The Solideal WEX delivers reliable performance for wheel excavators. It enhances the machine's stability with added side impact resistance and excellent traction.



TIRES FOR WHEEL EXCAVATORS

SOLIDEAL WEX

ROBUST CARCASS

- Enhances stability and side impact resistance

ADVANCED RUBBER COMPOUNDS


- Improves durability and cut resistance

DEEP LUG DEPTH


- Enhances durability and traction



| TIRE SIZE | PR | TT/ TBLs | RIM SIZE | | ACTUAL TIRE DIMENSIONS | | | LOAD INDEX | SPEED SYMBOL | MAXIMUM TIRE LOAD [kg] [lb] | | | | |
|-----------|----|-------------|------------------|--------------|------------------------|---------------------|-------------------------|------------|--------------|-----------------------------|---------------------|------------------|-------------------|-------------------|
| | | | RECOM- MENDED | ALTERNATIVE | O.D [mm] [in] | O.W [mm] [in] | O.T.D [mm] [32nd] | | | STATIC | | 16 km/h • 10 mph | | |
| | | | | | | | | | | Static | 0-8 km/h 0-5 mph | 10 km/h 6 mph | 25 km/h 16 mph | 45 km/h 28 mph |
| 9.00-20 | 14 | TT | 7.00 | 6.50 7.50 | 1022 | 267 | 19.5 | 153 | A2 | 6990 | 4170 | 3605 | 2975 | 2660 |
| | | | | | 15450 | 9200 | 7950 | | | 6550 | 5850 | | | |
| | | | | | 8.50 bar | 7.50 bar | 7.50 bar | | | 7.00 bar | 7.00 bar | | | |
| | | | | | 121 PSI | 107 PSI | 107 PSI | | | 100 PSI | 100 PSI | | | |
| 10.00-20 | 16 | TT | 7.50 | 7.00 8.00 | 1070 | 284 | 21 | 158 | A2 | 8215 | 4900 | 4240 | 3500 | 3125 |
| | | | | | 18150 | 10800 | 9350 | | | 7750 | 6900 | | | |
| | | | | | 8.50 bar | 8.00 bar | 8.00 bar | | | 7.50 bar | 7.50 bar | | | |
| | | | | | 121 PSI | 114 PSI | 114 PSI | | | 107 PSI | 107 PSI | | | |

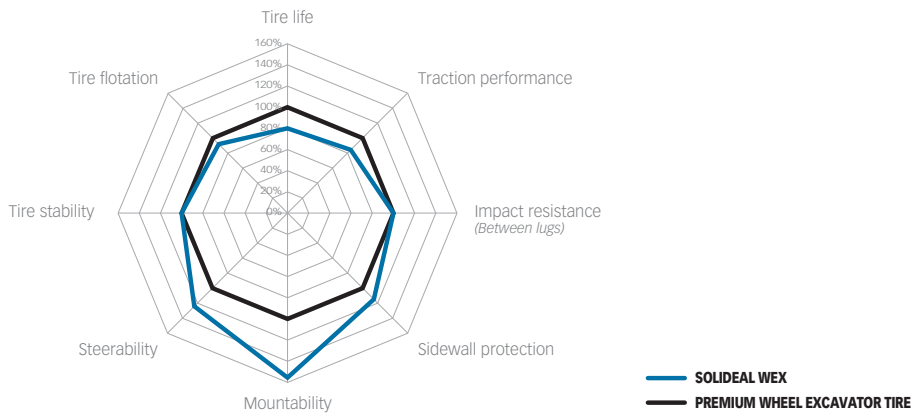

TREAD ASPECTS

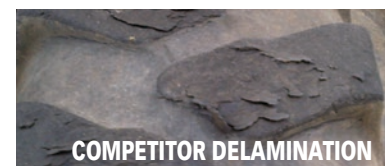

AUTHORIZED DISTRIBUTOR:

camoplastsolideal.com

